

# ALPHA<sup>®</sup> WS-826 SOLDER PASTE

Water Soluble, Lead-Free, Zero-Halogen Solder Paste

## DESCRIPTION

**ALPHA WS-826** is a water soluble, lead-free solder paste formulation developed for both nitrogen and air reflow applications. It offers a combination of excellent 8-hour stencil life at elevated temperatures and humidity levels, excellent solderability, and ease of water-based cleaning after 2x reflow while maintaining a zero-halogen flux formulation. **ALPHA WS-826** is a stable water soluble solder paste providing consistent stencil life and excellent print definition. It passes SIR & ECM requirements, after cleaning with DI water, and is classified as ORM0 under IPC J-STD-004B.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

## FEATURES & BENEFITS

- Excellent stencil life performance at extreme environmental conditions (30 °C, 70% RH)
- Highly cleanable with batch and inline aqueous systems after 1x and 2x reflow
- Passes SIR/ECM testing per IPC J-STD-004B after subjecting to aqueous cleaning process
- Consistent and repeatable print process window
- Reflowable in air and nitrogen conditions
- Exceeds IPC-7095 Class 3 classification

## PRODUCT INFORMATION

<u>Alloys:</u>	SAC305
<u>Powder Size:</u>	Type 4, Type 5
<u>Lead-Free:</u>	Complies with RoHS Directive EU/2015/863
<u>Halogen Content:</u>	Zero-Halogen

**TECHNICAL DATA**

ALPHA WS-826		
Category	Results	Procedures/Remarks
<b>Chemical Properties</b>		
Flux Classification	ORM0	IPC J-STD-004B
Halide / Halogen Content Test	No Halides / No Halogens detected	IPC J-STD-004B / BS EN 14582
Copper Mirror test	(M) Medium activity, <50% breakthrough of copper film	IPC J-STD-004B
<b>Electrical Properties</b>		
SIR (7 days, 40 °C/90% RH), Cleaned	$\geq 10^8$ Ohms for 7 days down to 100 $\mu$ m spacing	Modified IPC J-STD-004B
SIR (7days, 40 °C/90% RH), Cleaned	$\geq 10^8$ Ohms for 7 days on BGA packages	IPC J-STD-004B
Electrochemical Migration, Cleaned	No visual evidence of corrosion, discoloration or electromigration for 596 hrs	IPC J-STD-004B
<b>Physical Properties</b>		
Tack Life	Maintains consistent tack strength over 24 hours	JIS Z 3284
Tack Life	Pass, Less than 1 unit change in tack over 24 hours	IPC J-STD-005A
Stencil Life at Ambient Condition	8-hour consistent transfer efficiency	@25 °C/50% RH
Stencil Life at Elevated Condition	8-hour consistent transfer efficiency	@30 °C/70% RH
Cold Slump (25 °C/50% RH)	Pass, no bridging above 0.20 mm	IPC J-STD-005A
Hot Slump (150 °C/10 min)	Pass, no bridging above 0.25 mm	IPC J-STD-005A
Random Solder Balls	Preferred (Both initial & after 4 hrs at 25 °C and 50% RH)	IPC J-STD-004B; JIS Z 3284

**PROCESSING GUIDELINES**

The following process settings are offered as a process window guideline based on a typical SMT assembly. The optimum process settings will need to be identified specifically for each individual user due to variation in assembly design across the industry.

**Printing**

- STENCIL: Recommend ALPHA CUT or ALPHA FORM stencils at 0.100 to 0.125 mm (4 to 5 mil) thick for 0.40 mm (16 mil) pitch. Stencil design is subject to many process variables. Contact your local Alpha sales site for advice.
- SQUEEGEE: Metal (recommended)
- PASTE ROLL: 1.5 to 2.0 cm (0.60 to 0.80 in) diameter and make additions when roll reaches 1.0 cm (0.40 in) diameter
- PRESSURE: 0.22 to 0.35 kg/cm (1.25 to 2.0 lb/in) successfully tested for AR $\geq$ 0.60
- SPEED: 50 to 150 mm/sec for AR $\geq$ 0.60
- RELEASE SPEED: >5.0 mm/s
- DEPOSIT TO SPHERE RATIO: 0.40 to 0.60 recommended


**Cleaning**

- ALPHA WS-826 can be cleaned with hot deionized water in batch and inline cleaning systems.
- Cleaning temperatures between 49 °C/120 °F to 60 °C/140 °F can effectively be used.
- It is recommended to increase cleaning duration and to use 54 °C/130 °F cleaning temperature to improve removal process effectiveness. Required cleaning duration depends on the type of cleaning hardware and process temperature employed.

**Reflow**

- ATMOSPHERE: Air or Nitrogen (N<sub>2</sub>)
- PROFILE (SAC305 alloy): The following settings have been determined to give optimal results, but other settings give excellent results as well.
  - Ramp: 0.7 to 2.5 °C/sec (1.26 to 4.5 °F/sec)
  - Soak: 190 to 221 °C (374 to 430 °F), 90 seconds
  - TAL: >221 °C Liquidus (>430 °F), 60 to 90 seconds (120 seconds max)
  - Peak: 235 to 245 °C (235 to 430 °F)

**Recommended Profile:**

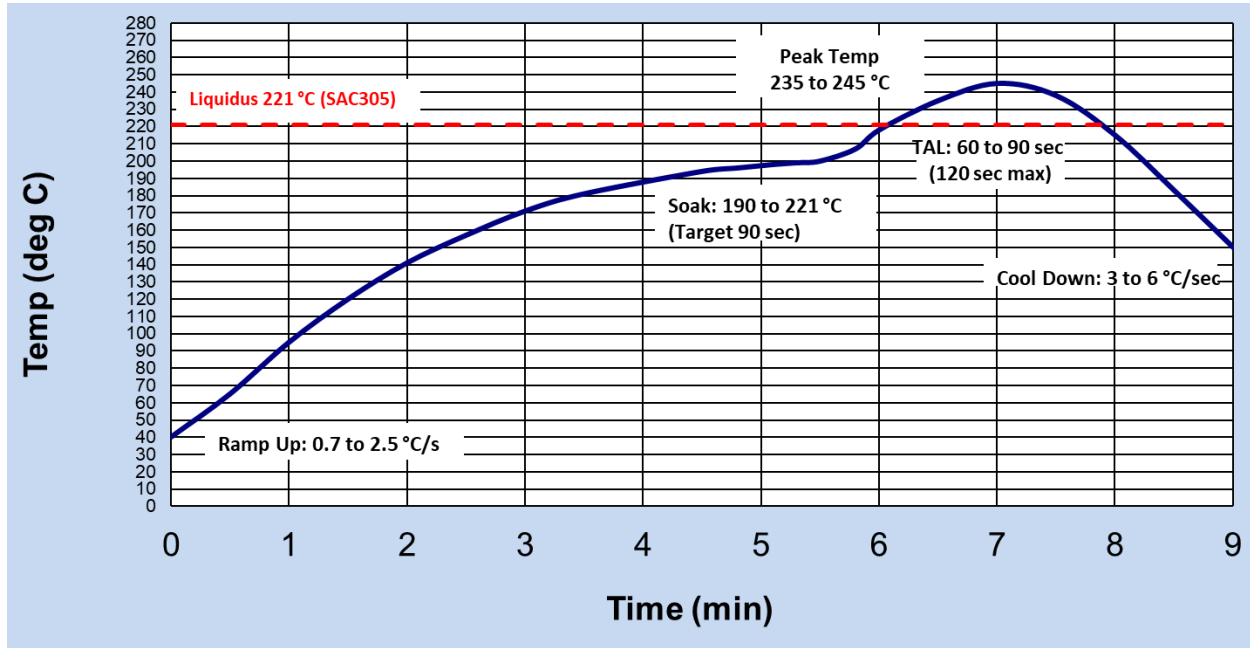

*Note: These are only recommendations. Equipment and assembly factors may require adjustments to be made to the reflow profile.*

**RECYCLING SERVICES**

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams. Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area or [link here](#).



**SAFETY & WARNING**

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at [MacdermidAlpha.com/assembly-solutions/knowledge-base](http://MacdermidAlpha.com/assembly-solutions/knowledge-base).**

**STORAGE & HANDLING**

ALPHA WS-826 is shipped in thermally controlled boxes and should be stored refrigerated upon receipt at 32 to 50 °F (0 to 10 °C). This paste should be permitted to reach room temperature before opening the package prior to use. When stored properly in unopened containers, it has a shelf life of 6 months from date of manufacture.

**CONTACT INFORMATION**

**To confirm this document is the most recent version, please contact  
 Assembly@MacDermidAlpha.com  
[www.macdermidalpha.com](http://www.macdermidalpha.com)**

<p><b>North America</b>                  109 Corporate Blvd.                  South Plainfield, NJ 07080, USA                  1.800.367.5460</p>	<p><b>Europe</b>                  Unit 2, Genesis Business Park                  Albert Drive                  Woking, Surrey, GU21 5RW, UK                  44.01483.758400</p>	<p><b>Asia</b>                  8/F., Paul Y. Centre                  51 Hung To Road                  Kwun Tong, Kowloon, Hong Kong                  852.3190.3100</p>
---	--	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.



SCAN ME