

ALPHA[®] 3355-VF

Water Soluble Organo-Flux

DESCRIPTION

ALPHA 3355-VF flux is a VOC-free modification of ALPHA 3355-11 water soluble organic acid flux, used in the soldering of printed circuits and electronic hardware. This formulation produces exceptional solder wetting to a wide variety of metallic surfaces and is unsurpassed in water solubility for thorough removal of post soldering residues.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

APPLICATION GUIDELINES

ALPHA 3355-VF flux can be wave, spray or dip applied. Flux applicators and reservoir should be plastic or titanium only. Flux coated surfaces should be preheated to provide optimum wicking and solder joint formation. The degree of preheat is dependent on many variables, such as conveyor speed, type of components and substrates. Entering the solder wave with a topside temperature in the 210 °F range is typical.

Control: When using recirculation type flux applicators, the specific gravity of the flux should be checked periodically with a hydrometer and restored to specified value by the addition of DI water.

In time, debris and contaminants will accumulate in the flux. For consistent soldering performance, dispose of spent flux in accordance with Federal, State and local laws, rules and regulations periodically. After emptying used flux, the reservoir should be thoroughly cleaned with DI water. Refill the reservoir with fresh flux and allow a few minutes to stabilize before resuming solder operation.

Residue Removal: After soldering, ALPHA 3355-VF residues must be removed. Removal can be accomplished in multi-zone conveyORIZED in-line spray systems, automated batch spray systems (dishwashers) or multi-stage batch tank cleaning. Multiple zone in-line systems equipped with quality tap or conditioned water, an effective air knife and drying capacity can produce MIL-P-28809 ionic cleanliness levels.


ALPHA 520 saponifier is recommended for improving cleanliness levels in batch and in-line systems with limited cleaning capabilities. Incorporating a saponifier or neutralizer will assist the removal of flux residues, aqueous spot mask and other contaminants.

To avoid the risk of corrosion, residues should be thoroughly cleaned, preferably, immediately or not beyond four hours after processing.

TECHNICAL DATA

| Item | Typical Values | Item | Typical Values |
|----------------------------------|----------------------|--------------------------------|---------------------|
| Appearance | Clear reddish liquid | Flash Point | None |
| Solids Content, wt/wt | 22.4% | Recommended Thinner | DI H ₂ O |
| Specific Gravity @ 25 °C (77 °F) | 1.052 ± 0.005 | Shelf Life (from Date of Mfg.) | 720 days |
| % Halide | 3.0 | IPC J-STD-004 Designation | ORH1 |
| pH (5% solution) | 1.2 | Packaging Size | 1, 5, 55 gallons |
| Pounds per Gallon | 8.74 | | |

Specific Gravity VS Temperature (°C)

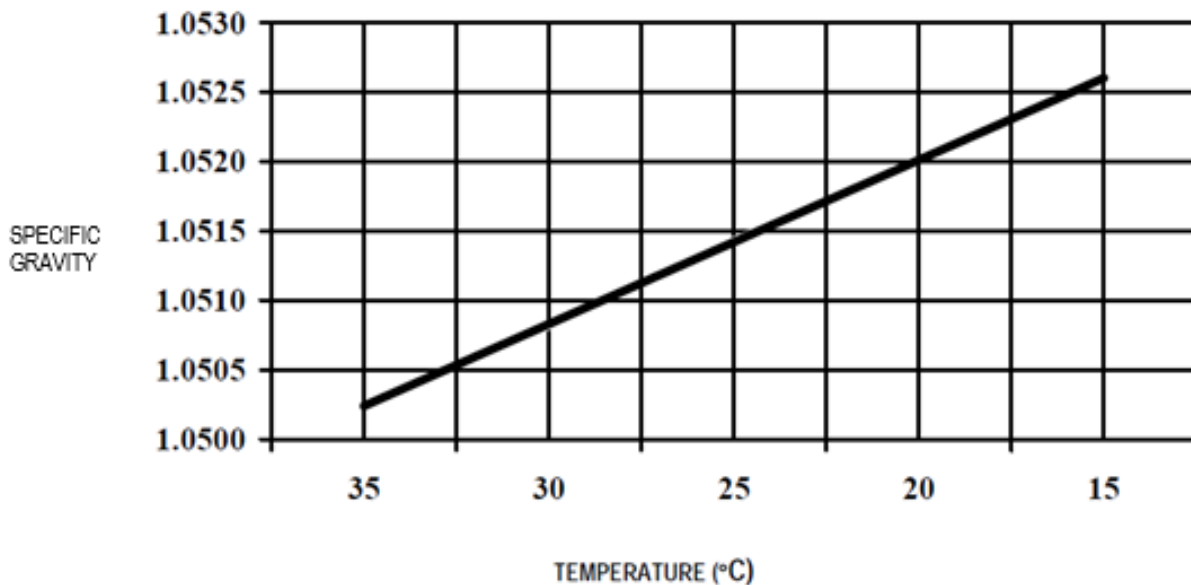

SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at AlphaAssembly.com**

CONTACT INFORMATION

To confirm this document is the most recent version, please contact
Assembly@MacDermidAlpha.com
www.macdermidalpha.com

| | | |
|---|---|---|
| <p>North America 109 Corporate Blvd. South Plainfield, NJ 07080, USA 800.367.5460</p> | <p>Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400</p> | <p>Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p> |
|---|---|---|

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. **READ IT THOROUGHLY PRIOR TO PRODUCT USE.** Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. **NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE.** The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.