

ALPHA[®] RMA-390DH5 FLUX GEL

Rosin Based Paste Flux

DESCRIPTION

ALPHA RMA-390DH5 Flux Gel is a rosin-based paste flux designed for rework of surface mount and other demanding electronic assembly applications. Because of its unique activator package and other special additives, **ALPHA RMA-390DH5 Flux Gel** can remain on the circuit board without cleaning. **ALPHA RMA-390DH5 Flux Gel's** activator system also enables the flux to penetrate even moderately tarnished surfaces.

* Process settings may need to be adjusted in special instances.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES AND BENEFITS

- **Wide Reflow Profile Window:** Allows best quality solderability of complicated, high-density PWB assemblies in both air and nitrogen reflow, using straight ramp or soak profiles up to 300 °C.
- **Excellent Solder Joint and Flux Residue Cosmetics:** After reflow soldering even using long/high thermal soaking without charring or burning.
- **Broad Range of Rework Capabilities:** Can be used for all touch up & hand soldering operations as well as BGA repair/re-balling and QFN/LGA repair.

PRODUCT INFORMATION

Packaging Sizes: 30cc syringe, 100 gram jar

Environmental Compliance: Complies with RoHS Directive 2011/65/E

APPLICATION GUIDELINES

ALPHA RMA-390DH5 FLUX GEL paste flux may be applied by screen printing or pin transfer (substrate) or doctor blade / dip coating (package). It can also be dispensed.


ALPHA RMA-390DH5 FLUX GEL can be safely left on the circuit board after reflow without cleaning. If cleaning is desired, most commercially available electronic assembly cleaning solvents are effective, including ALPHA 565. Flux residues are also removable by saponification with ALPHA 2110 in water.

TECHNICAL DATA

| Category | Results | Procedures/Remarks |
|---|---|---|
| Chemical Properties | | |
| Activity Level | ROLO | IPC J-STD-004 |
| Cu Mirror Corrosion Test | Pass | IPC J-STD-004 |
| Halide Content | Halide - Free | Based on Formulation |
| Electrical Properties | | |
| SIR (Bellcore 96 hours @ 35 °C/85%RH) | Pass , 2.5 x 10 ¹¹ ohms | Bellcore GR78-CORE (Pass ≥ 1 x 10 ¹¹ ohm) |
| Electromigration (Bellcore 500 hrs. @ 65°C/85%RH 10V) | Pass , 2.2 x 10 ¹⁰ ohms | Bellcore GR78-CORE (Pass=final > initial/10) |
| IPC SIR (7 days @ 85 °C/85% RH) | Pass , 1.1 x 10 ⁹ ohms | IPC J-STD-004A (Pass > 10 ⁸) |
| HP Electrochemical Migration (28 days @ 50 °C/90%RH 10V) | Pass | HP ECM |
| Physical Properties | | |
| Color | Smooth, Amber Paste | |
| Viscosity 5rpm at 25 °C by Malcom Viscometer | 400 to 1000 Poise | |
| Fineness of Grind (um) | <10 μm | |


REFLOW PROFILES

Fig 1: Typical Lead-Free Reflow Profile

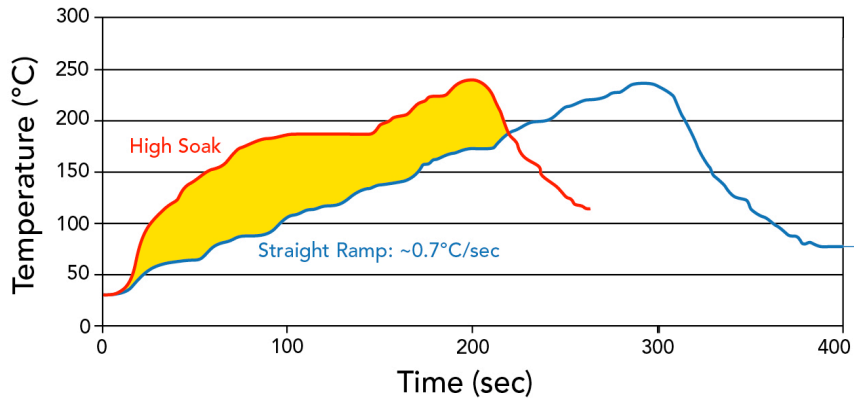

Note: This profile was tested in the lab with acceptable reflow and coalescence performance, optimization to each board application should still be carried out by users to ensure best results.

Figure 2: Typical 63Sn37Pb Reflow Profile

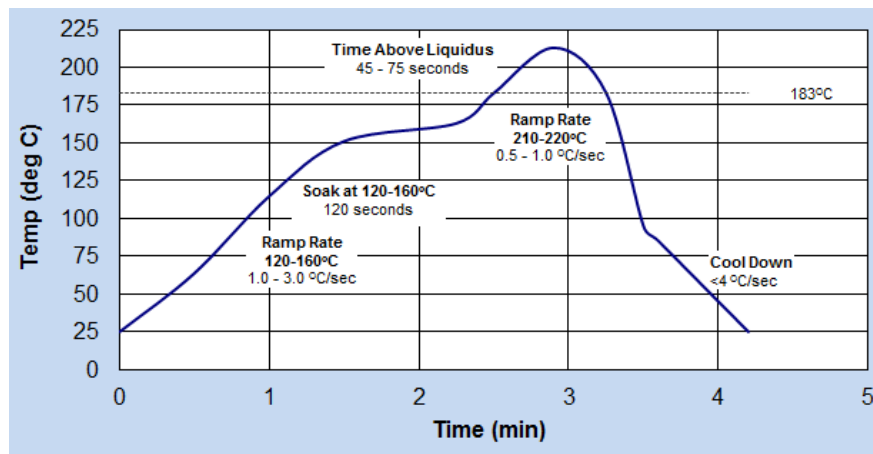

ALPHA RMA-390DH5 FLUX GEL can be safely left on the circuit board after reflow without cleaning. If cleaning is desired, most commercially available electronic assembly cleaning solvents are effective, including ALPHA 565. Flux residues are also removable by saponification with ALPHA 2110 in water.

RECYCLING SERVICES

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams.

Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area or [link here](#).



SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at MacdermidAlpha.com/assembly-solutions/knowledge-base.**

STORAGE

The flux should be stored in sealed containers and can be stored at room temperature up to 25 °C (77 °F) for up to 12 months. If the material has been refrigerated (stored @ 0 to 10 °C or 32 to 50 °F) then the container should be allowed to reach room temperature before opening in order to prevent moisture condensation from ambient air on the flux.

CONTACT INFORMATION

To confirm this document is the most recent version, please contact Assembly@MacDermidAlpha.com

www.macdermidalpha.com

| | | |
|--|--|---|
| <p>North America 109 Corporate Blvd. South Plainfield, NJ 07080, USA 1.800.367.5460</p> | <p>Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400</p> | <p>Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p> |
|--|--|---|

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE . Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.