

ALPHA[®] OM-367A Solder Paste

No-Clean, Zero Halogen, Lead-Free

DESCRIPTION

ALPHA OM-367A is a lead-free, zero halogen, NWO (Non-Wet Open) resistant, no-clean solder paste designed for minimizing BGA non-wet and head in pillow defects.

ALPHA OM-367A is also designed to enable high first pass yield on ICT pin testing. The product also provides consistent fine pitch printing capability. Additionally, **ALPHA OM-367A** achieves IPC7095 Class III voiding performance.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES AND BENEFITS

- **Residue:** Able to achieve very high first pass yield on ICT Pin Testing
- High resistance to NWO and HIP defects
- **Long Stencil Life:** consistent performance for at least 8 hours of continuous printing
- Long, High Tack Force Life: ensures high pick-and-place yields, good self-alignment
- **Reflow Profile Window:** Nitrogen or air reflow
- **Excellent Coalescence and Wetting Performance:** coalesced 170µm circle deposit in Nitrogen reflow process
- **Excellent Solder Joint and Flux Residue Cosmetics:** After reflow soldering, no charring or burnt residue appearance
- **Excellent Voiding Performance:** Meets IPC7095 Class III Requirement
- **Halogen Content:** Halogen free
- **Safe and Environmentally Friendly:** Materials comply with ROHS and Zero Halogen requirements, as well as TSCA

PRODUCT INFORMATION

<u>Alloys:</u>	SAC305 (96.5%Sn/3.0%Ag/0.5%Cu)
<u>Powder Size:</u>	Type 4, (20 to 38µm per IPC J-STD-005)
<u>Packaging Sizes:</u>	500 gram jars
<u>Lead Free:</u>	RoHS Directive EU/2015/863; amending Annex II of 2011/65/EU

APPLICATION GUIDELINES
Printing

Formulated for both standard and fine pitch stencil printing, at print speeds of between 25mm/s (1in/s) and 150mm/s (6in/s), with stencil thickness of 100µm (4 mil) to 150µm (6 mil), particularly when used with ALPHA Stencils. Blade pressures should be 0.18 to 0.27 kg/cm of blade (1.0 to 1.5 lbs/inch), depending upon the print speed. The higher the print speed employed, the higher the blade pressure that is required.

HALOGEN STATUS

ALPHA OM-367A is a halogen free product and passes the standards listed in the Table below:

Halogen Standards			
Standard	Requirement	Test Method	Status
JEITA ET-7304 Definition of Halogen Free Soldering Materials	< 1000 ppm Br, Cl, F in solder material solids	TM EN 14582	Pass
IEC 612249-2-21	Post Soldering Residues contain < 900 ppm each or total of < 1500 ppm Br or Cl from flame retardant source		Pass
JEDEC A Guideline for Defining "Low Halogen" Electronics	Post soldering residues contain < 1000 ppm Br or Cl from flame retardant source		Pass
Zero Halogen: No halogenated compounds have been intentionally added to this product			


TECHNICAL DATA

Category	Results	Procedures/Remarks
Chemical Properties		
Activity Level	ROLO	IPC J-STD-004B
Halide Content	Halide free (by titration)	IPC J-STD-004B
Halogen Test	Pass, Zero Halogen	By formulation
Fluoride Spot Test	Pass	JIS Z 3197:1999 8.1.4.2.4
Copper Mirror Test	Pass	IPC J-STD-004B

Category	Results	Procedures/Remarks
	Pass	JIS Z 3197:1999 8.4.2
Copper Corrosion Test	Pass	IPC J-STD-004B
Electromigration	Pass	IPC SIR (2.6.3.7)
Physical Properties		
Color	Clear, Colourless Flux Residue	
Tack Force	Pass, change of < 1 g/mm ² over 24 hours at 50% RH	IPC J-STD-005
Viscosity	88% metal load, Type 4 designated M14 for printing Viscosity (Typical) at 10 rpm	Malcom Spiral Viscometer; J-STD-005
Coalescence Test	Able to reflow at 170µm circle size in Nitrogen process	Internal coalescence test
Solder Ball	Preferred	IPC J-STD-005B TM-650 2.4.43

REFLOW PROFILES

Suggested Typical Profile for ALPHA OM-367A SAC305

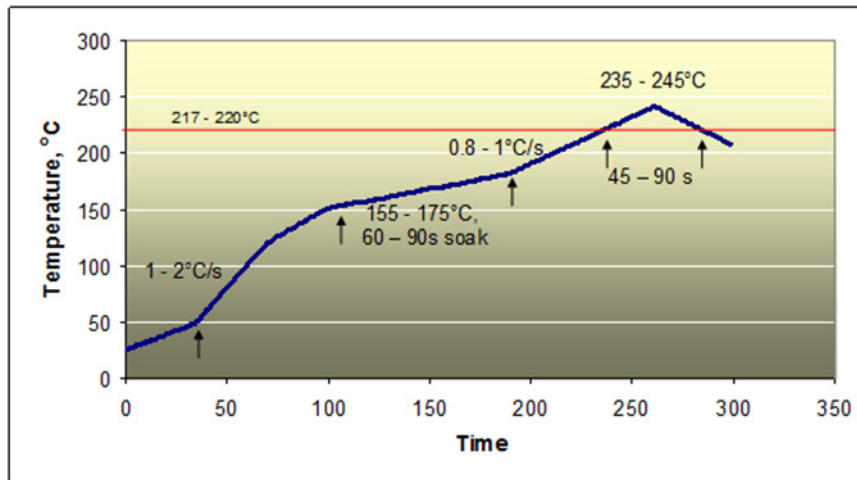

Note: These are profiles that were tested in the lab with acceptable reflow and coalescence performance, optimization to each board application should still be carried out by users to ensure best results.

RECYCLING SERVICES

We provide safe and efficient recycling services to help companies meet their environmental and legislative requirements and at the same time, maximize the value of their waste streams.

Our service collects solder dross, solder scrap, and various forms of solder paste waste. Please contact your local sales representative for recycling capabilities in your area or [link here](#).



SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at MacdermidAlpha.com/assembly-solutions/knowledge-base.**

STORAGE

ALPHA OM-367A should be stored in a refrigerator upon receipt at 0 to 10 °C (32 to 50 °F). It should be permitted to reach room temperature before unsealing its package prior to use. Recommended working temperature and humidity shall be 23 to 25 °C and 40 to 60% respectively. Refer to the General Solder Paste Handling Guidelines for further information.

CONTACT INFORMATION

To confirm this document is the most recent version, please contact Assembly@MacDermidAlpha.com

www.macdermidalpha.com

<p>North America 109 Corporate Blvd. South Plainfield, NJ 07080, USA 1.800.367.5460</p>	<p>Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 44.01483.758400</p>	<p>Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100</p>
--	--	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.