

Kester NP505-HR

High-Reliability, Zero-Halogen, Lead-Free, No-Clean Solder Paste


The Flux for High Reliability Applications

Kester NP505-HR Solder Paste is a high reliability, zero-halogen, lead-free, no-clean solder paste. NP505-HR is specifically designed for challenging applications such as automotive and aerospace or where superior SIR performance is required. NP505-HR provides very reliable post-reflow residues and passes the most challenging industry SIR conditions. NP505-HR is available in both SAC305 and the leading high performance Innolot alloy.



Key Features

- Zero-Halogen (none intentionally added)
- Reliable post reflow residues passing even the harshest SIR testing
- Reflowable in both air and nitrogen
- Consistent print performance to 0.55AR (SAC305) and 0.57AR (Innolot)
- Low QFN/BGA voiding
- Excellent solderability across wide variety of profiles
- Compatible with most conformal coating materials
- Stable paste properties: 12-month shelf life for SAC305 and 6-month shelf life for Innolot

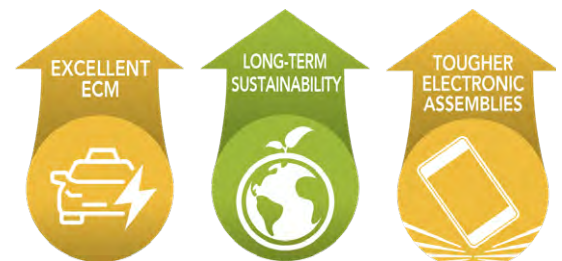

NP505-HR Solder Paste

High-Reliability, Zero-Halogen, Lead-Free, No-Clean

PERFORMANCE SUMMARY

PROCESS	PERFORMANCE ATTRIBUTE	NP505-HR WITH INNOLOT CAPABILITY
Printing	Print Definition	Consistent fine feature print volumes, reaching area ratio of 0.57 with standard print set-up. Able to reduce AR with advanced printing technology
	Print Durability (Stencil Life)	No significant paste degradation after 6 hours of printing
	Print Relax & Recovery	2 hours relax/recovery remains consistent across full range of viscosity
	Print Temperature Window	Consistent printing performance at the temperature of 22-30 °C/71.6-86 °F and the relative humidity of 30-65% RH
	Print Speed Range	Consistent printing performance from speeds of 1-6 in/sec (25-150 mm/sec). Slower speeds are beneficial for area ratios at or below 0.55
Reflow	Reflow Process Window	Consistent solderability across all profiles – short, medium or long soak in both air and nitrogen
	Void behavior	Minimum voiding observed across variety of reflow profiles
	Hot/Cold Slump Performance	Meets requirements of IPC J-STD-005B
	Flux Residue Appearance	Light clear residues
	ICT Probability	Consistent hard probable surface, shatter-type residue



macdermidalpha.com
July 2021

Kester is a product brand of MacDermid Alpha Electronics Solutions.

For more information, contact us at
Assembly@MacDermidAlpha.com

© 2021 MacDermid, Inc. and its group of companies. All rights reserved.
® and ™ are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.