

# ALPHA<sup>®</sup> 3355-11

## Water Soluble Flux

### DESCRIPTION

**ALPHA 3355-11** Water Soluble Flux is a water removable flux used in the soldering of printed circuit and electronic hardware. This formulation produces exceptional solder wetting to a wide variety of metallic surfaces and is unsurpassed in water solubility for thorough post solder removal.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

### APPLICATION GUIDELINES

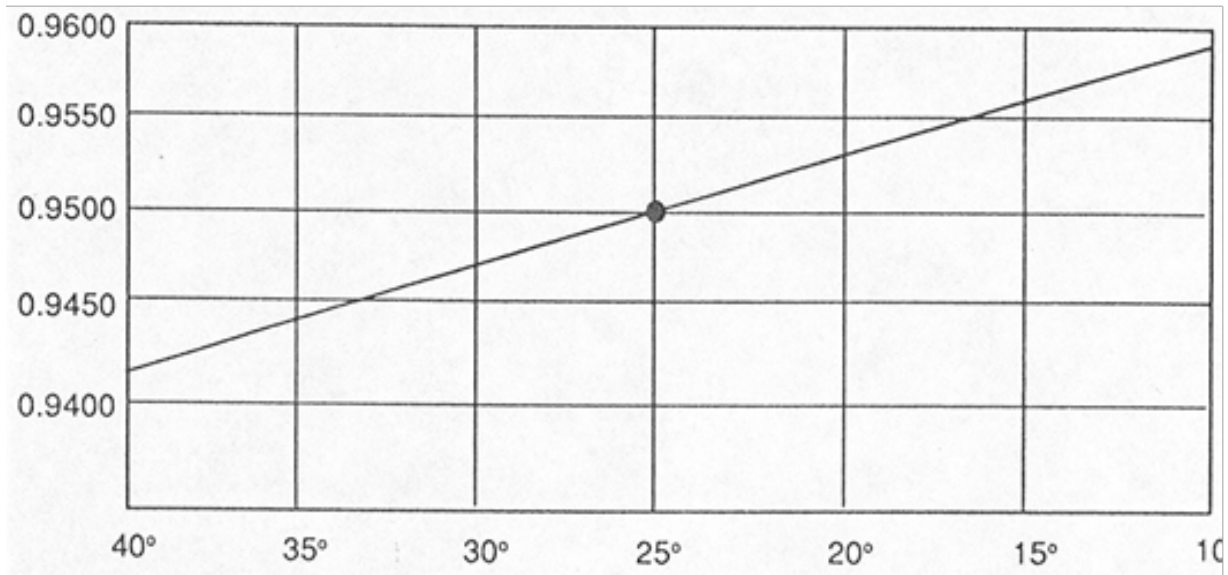
Primarily for foam application and conveyORIZED soldering, ALPHA 3355-11 Flux can be spray, dip, wave or brush applied. Flux applicators and reservoir should be plastic or titanium only.

Flux coated surfaces should be preheated to provide optimum wicking and solder joint formation. The degree of preheat is dependent on many variables, such as conveyor speed, type of components and substrates. Entering the solder wave with a topside temperature in the 210 to 230 °F range is typical.

**Control:** The foam applicators should be supplied with compressed air, free of oil and water. Maintain flux fluid level sufficiently above the aerator stone to produce adequate foam height. Adjust air pressure to produce the optimum height with foam consisting of small uniform bubbles.

During use, the specific gravity of the flux should be checked periodically. This can be accomplished with a hydrometer. Evaporated solvent should be replenished by the addition of flux thinner.

In time, debris and contaminants will accumulate in the flux. For consistent soldering performance, replace flux periodically. After dumping used flux, the reservoir and aerator stone should be thoroughly cleaned with flux thinner. Refill the reservoir with fresh flux and allow a few minutes for foam to stabilize before resuming solder operation.

**Figure 1: Specific Gravity VS Temperature Chart**

**Residue Removal:** After soldering, the water soluble residues must be removed. Removal can be accomplished in multi-zone conveyerized in-line spray systems, automated batch spray systems (dishwashers) or multi-stage batch tank cleaning. Multiple zone in-line systems equipped with quality tap or conditioned water, an effective air knife and drying capacity can produce MIL P-28809 ionic cleanliness levels.

A saponifier product is recommended for improving cleanliness levels in batch and in-line systems with limited cleaning capabilities. Incorporating a saponifier or neutralizer will assist the removal of flux residues, aqueous spot masks and other contaminants.

To avoid the risk of corrosion, residues should be thoroughly cleaned, preferably, immediately or not beyond four hours after processing.

**TECHNICAL DATA**

Item	Typical Values	Item	Typical Values
Appearance	Clear pink to red liquid	Flash Point (6-23-81-BB)	71 °F
Solids Content, wt/wt	17%	Recommended Thinner	3355-11 Additive
Specific Gravity @ 25 °C (77 °F)	0.95 ± 0.02	Shelf Life (from Date of Mfg.)	540 days
Acid Number (mg KOH/g)	60	IPC J-STD-004 Designation	ORH1
pH, as is	1.3 ± 0.5	Pounds per Gallon	7.91
% Chloride	3.0		

**SAFETY & WARNING**

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at [MacDermidAlpha.com/assembly-solutions/knowledge-base](http://MacDermidAlpha.com/assembly-solutions/knowledge-base)**

**CONTACT INFORMATION**

**To confirm this document is the most recent version, please contact  
 Assembly@MacDermidAlpha.com  
[www.macdermidalpha.com](http://www.macdermidalpha.com)**

<p><b>North America</b>          109 Corporate Blvd.          South Plainfield, NJ 07080, USA          800.367.5460</p>	<p><b>Europe</b>          Unit 2, Genesis Business Park          Albert Drive          Woking, Surrey, GU21 5RW, UK          01483.758400</p>	<p><b>Asia</b>          8/F., Paul Y. Centre          51 Hung To Road          Kwun Tong, Kowloon, Hong Kong          852.3190.3100</p>
---	---	---

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "R" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.